




中国建材国际
CNBM International

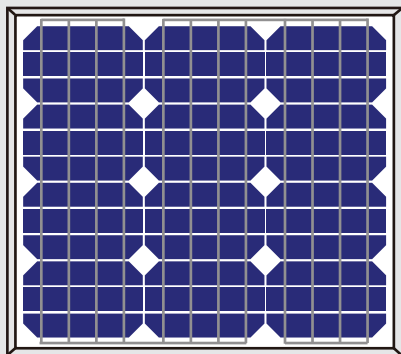

Solar Panel Energy (Pty) Ltd

VAT: 4600287983

204 Louis Trichardt Blvd, Vanderbijlpark

www.sp-energy.co.za

CNBM 6M-30

MONOCRYSTALLINE SILICON MODULE

RAW MATERIALS AND MECHANICAL PARAMETERS

6M-30

Type of Cells(mm)	Mono 156 x 31.2
NO. of Cells and Connections	3 x 12=36
Dimensions(mm)(L*W*H)	450 x 510 x 25mm
Weight(kg)	2.7Kg
Glass	3.2mm Tempered Glass
Encapsulation	EVA
Backsheet	Multilayer Composite
Frame	Silver Anodized Aluminium Alloy
Junction Box	Ip65 / IP67
Package Configuration	10pcs

PERFORMANCE PARAMETERS

6M-30

Maximum System Voltage	700V
Operating Temperature	-45~+80°C
Maximum Series Fuse	/
Maximum Static Load, Front Side (e.x. Snow, Wind)	5400Pa
Maximum Static Load, Back Side (e.x. Wind)	2400Pa
Application Grade	Class A

ELECTRICAL PARAMETERS (STANDARD TEST CONDITION)

6M-30

Rated Maximum Power(Mp)	30W
Power Tolerance	0~+5W
Module Efficiency	17.6%
Open Circuit Voltage(Voc)	22.6V
Maximum Power Voltage(Vmp)	17.6V
Short Circuit Current(Isc)	1.83A
Maximum Power Current(Imp)	1.71A
Temperature Coefficient of Isc	+0.06%
Temperature Coefficient of Voc	-0.32%
Temperature Coefficient of Pmp	-0.45%



Widely using of the most popular and mature type of modules for on-grid system.



Leading manufacturing technology in PV industry, strictly controlling the quality of raw materials and the process of producing.



100% EL inspection ensures modules are defects free.



Cells binned by current to improve module performance.



100% EL inspection ensures modules are defects free.



Anti reflective glass. Not only to increase the light absorption, but also to make the module has the function of self-cleaning in water environment, effectively reducing the power loss caused by dust.



Excellent mechanical load resistance: Certified to withstand high wind loads (2400pa) and snow loads(5400pa)



High salt and ammonia resistance.



Positive power tolerance:0~+5w.



10 years
products
warranty

25 year
power output
warranty

Address: Floor 17-18th, No.4 Building Zhuyu
International Commercial Center
No.9 Shouti South Road, Haidian
District, Beijing 100048, China
Website: www.cnbm-solar.com

Standard Test Condition

Irradiance:1000W/M2,Cell Temperature:25°C,Spectrum AM:1.5

The Electrical Parameters of the module are the average theory figure under the standard test condition, each one exists difference. Can not be treated as the basis of module delivery.