


Smart String Energy Storage System



24 hours power supply

100% Depth of Discharge
Pack Level Energy Optimization

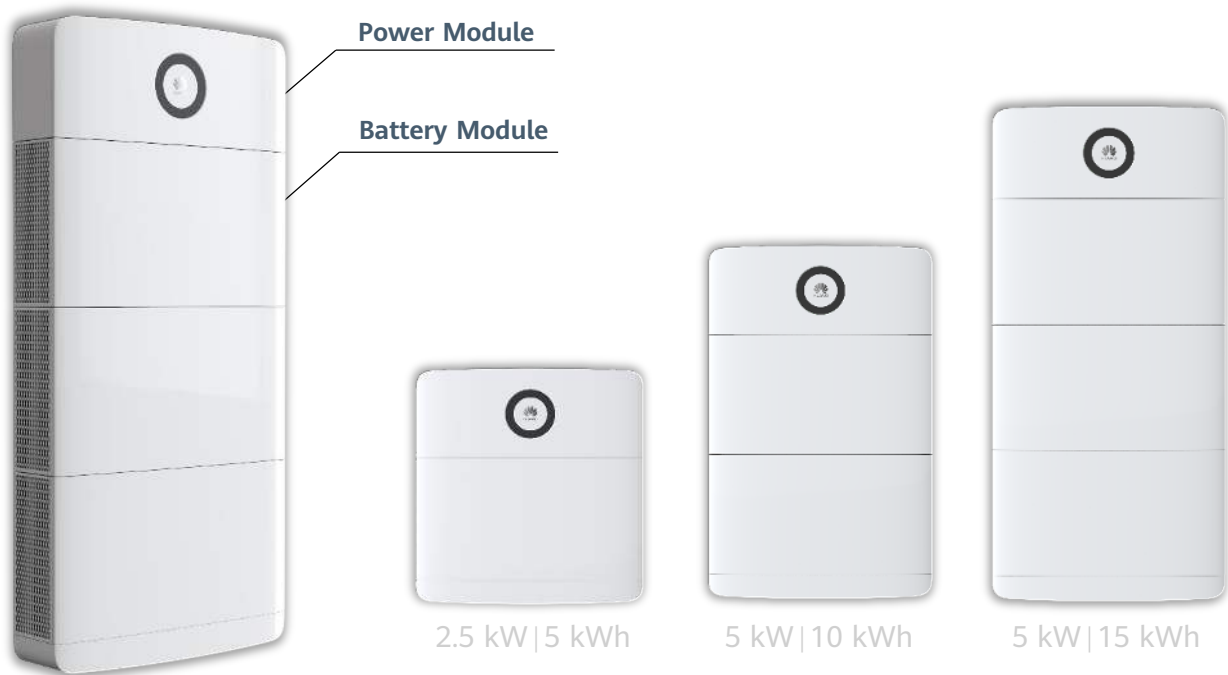

Safe & Reliable

Lithium Iron Phosphate (LFP) Cell
Cell Level Monitoring
Port 0V Voltage
Built-in Extinguish Bag



High quality Experience

Sleep-level Noise
One app for All Control

	System Specifications					
Power module	iSitePower-M-MAP05A1					
Output/input power per module	2.5 kW					
Battery module	iSitePower-M-MAB05B1					
Battery module energy	5 kWh					
Number of power modules	1					
Number of battery modules	1	2	3	4	5	6
Battery usable energy ¹	5 kWh	10 kWh	15 kWh	20 kWh	25 kWh	30 kWh
Max. output power	2.5kW	5 kW	5 kW	5 kW	5 kW	5 kW

	Communication
Display	SOC status indicator
Communication	CAN (Parallel communications for power modules / Parallel communications between the battery module and power module / Communications for battery modules) Connect to Smart PVMS in WLAN/FE/4G communication mode

	General Specification
Power module dimension (W*H*D)	700 * 246 * 152 mm
Power module weight	17 kg
Battery module dimension (W*H*D)	700 * 390 * 158 mm
Battery module weight	50 kg
Base dimension (W*H*D)	700 * 65 * 147 mm (floor installation) 643 * 110 * 176 mm (wall-mounted installation)
Base weight	1.5 kg (floor installation) 5.5 kg (wall-mounted installation)
Installation Mode	Wall-mounted/ground-mounted
Protection rating	IP 66
Cell technology	Lithium-iron phosphate (LiFePO4)

	AC input
Input voltage	200/208/220/230/240 V AC
Input current	Max. 30 A
Frequency	50/60 Hz
Maximum bypass input power	6 kW
Lightning protection	Differential mode (between live and neutral): 3 kA; 8/20 μ s Common mode (between live or neutral and PE, between live/neutral pair and PE): 5 kA; 8/20 μ s
	PV input
MPPT voltage range	90-420 V DC
Maximum input capacity of the MPPT	5.5 kWp
PV string quantity	2 strings
Number of MPPT channels	1 channel
Maximum input current for one string	12.5 A
Maximum short circuit current for one string	18 A
Lightning protection	Common mode (between PV+/PV- pair and PE): ± 10 kA; 8/20 μ s
	AC output
Output voltage system	Single-phase 200/208/220/230/240 V AC. The default value is 220 V AC
Output frequency	50/60 Hz. The default value is 50 Hz.
Maximum output current	30 A
Output power	6 kVA/5 kW
Power factor	0.8
	Overload capacity
102% \leq Load \leq 125%	30 s
125% < Load \leq 150%	10 s
> 150%/short circuit	0.3 s
	AC parallel box
Dimensions (W * H * D)	350 mm x 450 mm x 150 mm
Weight	Approx. 12 kg
Input voltage	200/208/220/230/240 V AC. The default value is 220 V AC.
Input current	Max. 90 A
Output voltage	200/208/220/230/240 V AC. The default value is 220 V AC.
Output current	Max. 90 A
Cable outlet mode	Bottom in and bottom out
Installation Mode	Wall-mounted or pole-mounted installation
Degree of protection	IP55
	Environmental parameters
Operating temperature	0°C to 45°C
Relative humidity	5%-95% (RH)
Altitude Requirements	0~4000 m (The operating temperature decreases by 1°C per 200 m when the altitude is 2000 m to 4000 m)
	Compliance information
Certifications	IEC62920: 2017, CISPR11: 2015+A1: 2016/EN55011: 2016+A1: 2017, EN62040-2, ETSI EN 301 489-1, ETSI EN 301 489-17, IEC61000-3, IEC 62619, IEC 62109-1, IEC 62109-2, RoHS, EN 50385, RCM, UKCA, ICE 60730, UN38.3



1. Test conditions: 100% depth of discharge (DoD), 0.2C rate charge & discharge at 25°C, at the beginning of life. If no PV modules are installed or the system has not detected sunlight for at least 24 hours, the minimum end of discharge SOC is 15%.
2. The weight of the battery module is subject to the actual product, with a tolerance of $\pm 3\%$
3. Refer to battery warranty letter for conditional application.
4. Improper storage system installation may compromise product warranty and operation safety. Please follow the user manual during the installation, use, and maintenance of the storage system.



Copyright © Huawei Technologies Co., Ltd. 2022. All rights reserved.

No parts of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd

Trademark Notice

 HUAWEI and  are trademarks or registered trademarks of Huawei Technologies Co., Ltd. Other trademarks ,product ,service and company names mentioned are the property of their respective owners.

General Disclaimer

The information in this document may contain predictive statement including, without limitation, statements regarding the future financial and operating results, future product portfolio, new technology, etc. There are a number of factors that could cause actual results and developments to differ materially from those expressed or implied in the predictive statements. Therefore, such information is provided for reference purpose only and constitutes neither an offer nor an acceptance. Huawei may change the information at any time without notice.

Huawei Technologies Düsseldorf GmbH

Südwestpark 37-41, 90449 Nürnberg, Deutschland
Hotline: 0080 03 38 88 888
Email: eu_inverter_support@huawei.com

HUAWEI TECHNOLOGIES SWITZERLAND AG

Waldeggstrasse 30 3097 Liebefeld BE Switzerland
Hotline: 0080 03 38 88 888
Email: eu_inverter_support@huawei.com

HUAWEI TECHNOLOGIES CO.,LTD

Huawei Industrial Base Bantian Longgang
Shenzhen 518129, P.R.China
Tel.: 400-822-9999 Version No.: 04-(20201006)
solar.huawei.com