



Half-Cell SERIES

HTM360~380PH-78

Half-Cell Polycrystalline Silicon PV Modules



HIGH OUTPUT POWER

Output power is higher than the same type of conventional polycrystalline modules



ANTI-PID CHARACTERISTICS

Ensure large-scale production of half-cell polycrystalline modules pass PID test



HOT-SPOT EFFECT

Excellent hot-spot immunity, can effectively avoid the power loss caused by shadow coverage, significantly extend life span



LOAD CAPACITY

Certified to withstand: wind load(2400 Pascal)and snow load(5400 Pascal)




HARSH ENVIRONMENT ADAPTATION

High salt mist and ammonia resistance certified by TUV

LINEAR PERFORMANCE WARRANTY

12-year product warranty / 25-year linear power warranty

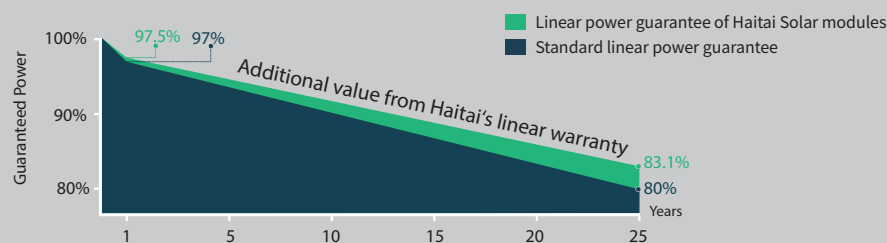

Mechanical Data

Cell Type	156.75×78.375mmPoly
Cell Orientation	156(6×26)
Module Dimensions	2136×992×35mm
Weight	23.5kg
Glass	3.2mm high transmittance, reinforced glass
Backsheet	Anti-aging film
Frame Material	Anodized aluminum alloy
Junction Box	Protection class IP68
Cable	4.0 mm ² positive pole: 250 mm negative pole: 300 mm wire length can be customized
Connector	MC4 compatible connector

HTM360~380PH-78

Half-Cell Polycrystalline Silicon PV Modules

Electrical Data (STC)

Maximum Power (Pmax/W)	360	365	370	375	380
Open Circuit Voltage (Voc/V)	50.48	50.68	50.88	51.08	51.28
Short Circuit Current (Isc/A)	9.14	9.23	9.32	9.41	9.50
Voltage at Maximum Power (Vmp/V)	41.21	41.41	41.61	41.81	42.01
Current at Maximum Power (Imp/A)	8.74	8.82	8.90	8.97	9.05
Module Efficiency (%)	16.99	17.23	17.46	17.70	17.93

Electrical Data (NMOT)


Maximum Power (Pmax/W)	266	270	274	278	282
Open Circuit Voltage (Voc/V)	46.26	46.46	46.66	46.86	47.06
Short Circuit Current (Isc/A)	7.52	7.60	7.67	7.74	7.80
Voltage at Maximum Power (Vmp/V)	38.23	38.43	38.63	38.83	39.03
Current at Maximum Power (Imp/A)	6.96	7.03	7.10	7.16	7.23

STC (Standard Testing Conditions): Irradiance 1000W/m², Cell Temperature 25°C, AM1.5


NMOT (Nominal Module Operating Temperature): Irradiance 800W/m², Ambient Temperature 20°C, AM1.5, Wind Speed 1m/s.

I-V Curve

Current-Voltage Curve(380W)



Power-Voltage Curve(380W)



Temperature Coefficients

Temperature Coefficient (Pm)	-0.370%/°C
Temperature Coefficient (Voc)	-0.290%/°C
Temperature Coefficient (Isc)	0.050%/°C


Operating Parameters

Maximum System Voltage	1000/1500V
Operating Temperature	-40°C ~+85°C
NMOT (Nominal Module Operating Temperature)	41±3°C

Packaging

Modules Per Pallet: 31+31pcs/31+31+4 pcs
Modules Per 40'HQ Container: 620pcs/660 pcs

Module Dimensions (mm)

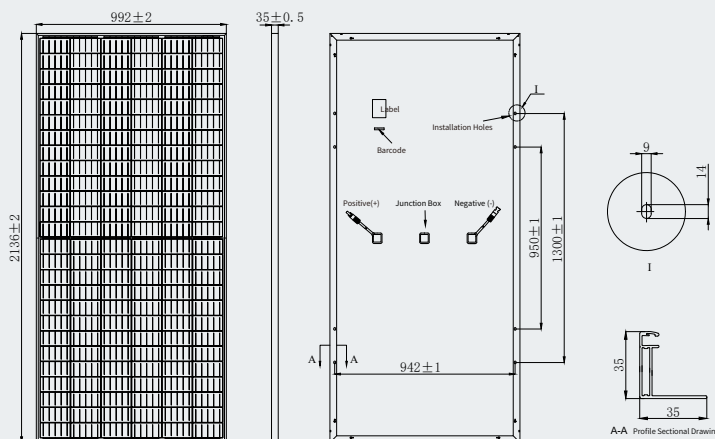

*Due to continuous innovation, R & D and product improvement, Haitai Solar has the right to adjust the specs on this datasheet at any time without prior notice.

 **Haitai Solar**

Tangshan Haitai New Energy Technology Co., Ltd.

Add: No.88, Haomen Road, Yutian County, Tangshan City, Hebei Province, China

Tel: +86-315-5051826 E-mail: ht@htsolargroup.com

Web: www.haitai-solar.com