


SNA 3-5k

Reclaim Your Power

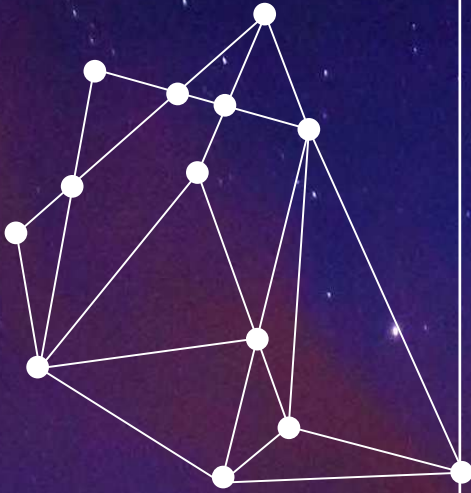

- Intelligent offgrid & hybrid modes
- PV & AC power loads simultaneously
- Wide PV input voltage range
- Easy to use with battery
- Free monitoring & remote upgrade
- Single phase or unbalanced three phase
- Advanced Parallel, up to 50kW
- Separate generator interface available
- Host inverter automatically generated to manage entire system

Solar Panel Energy (Pty) Ltd
204 Louis Trichardt Blvd, Vanderbijlpark
inquiry@sp-energy.co.za
www.sp-energy.co.za

No More Blackouts

Output

SNA5000

Rated power	5000W/5000VA
Parallel capacity	YES
Normal output voltage	230/240, Split phase 220/110 Vac
Normal output frequency	50/60Hz
Surge power	10000VA
Switch time	10ms
Wave form	Pure sine wave

Battery

Battery Type	Lithium/Lead-Acid
Normal Voltage	51.2V/48V
Max. Charge Voltage	59V

Solar

Max. Recommended PV Power	3200W/3200W
MPPT Tracker	2
Max. PV Open Circuit Voltage	480Vdc
MPPT Voltage Range	100-385Vdc
Max. Solar Charge Current	100A
Max. Solar Input Current	13A/13A
Max. MPPT Efficiency	>98%
Parallel MPPT Charger	YES

Grid

Normal Voltage	230Vac
AC Voltage Range	110-280Vac
Max. Charge Current	60A
Frequency Range	50/60Hz(Auto Sensing)

General

Dimensions(W/H/D)	330x504x135mm
Weight	14Kg
Protection Degree	IP20
Relative Humidity	5%~95% Relative Humidity(Non-condensing)
Operating Temperature	0°C~50°C
Storage Temperature	-15°C~60°C

Interface

Display	LCD+LED
Lithium Battery Communication	CAN/RS485
RS485/Dry Connector	YES/YES
Wifi/GPRS	YES/YES
Warranty	2 year